

Review on Study of Different Routing Protocols in Wireless Sensor Network

Poonam

Research scholar, Department of Computer Science and Engineering,
UIET, M.D. University, Rohtak, Haryana (India)
poonamdhanekar11@gmail.com

Publishing Date: December 27, 2017

Abstract

WSN is a one of the most regularly communication instruments utilized as a part of numerous territories at the life, in the two civilians and militaries. These networks composite from countless little devices called sensor nodes. The sensor nodes convey together by numerous wirelessly techniques. These communication systems administrated by routing protocols. Routing protocols for wireless sensor networks are in charge of keeping up the courses in the network and need to guarantee dependable multi-hop communication under these conditions. This paper studies recent routing protocols for sensor networks and exhibits a classification of different routing protocols in the wireless sensor network.

Keywords: *Wireless Sensor Networks, Routing Protocols, Sensors, Classification of Protocols.*

1. Introduction

A Wireless Sensor Network (WSN) contains hundreds or thousands of these sensor nodes. These sensors can convey either among each other or straightforwardly to an outer base-station (BS). A more prominent number of sensors consider sensing over bigger geographical regions with more prominent exactness. A Wireless Sensor Network (WSN) comprises of spatially appropriated autonomous sensors to screen physical or environmental conditions, for example, temperature, sound, vibration, pressure, motion or pollutants and to helpfully go their data through the network to a fundamental area[1]. The more current networks are bi-directional, empowering additionally to control the movement of the sensors. The improvement of wireless sensor networks was spurred by military

applications, for example, war zone observation; today such networks are utilized as a part of numerous industrial and civilian application areas, including industrial process monitoring and control, machine health monitoring, environment and habitat monitoring, healthcare applications, home mechanization, and movement control. The WSN is worked of nodes - from a couple to a few hundreds or even thousands, where every node is associated with one (or some of the time a few) sensors. WSNs can fluctuate from a straightforward star network to a progressed multi-hop wireless mesh network. The engendering procedure between the hops of the network can be routing or flooding[2].

2. Routing Protocols in WSN

Routing is a procedure of deciding a path between the source node and the sink(destination) endless supply of data transmission. In WSNs the network layer is for the most part used to actualize the routing of the approaching data. It is realized that for the most part in multi-jump networks the source node can't achieve the sink specifically. One of the principle outline objectives of WSNs is to complete data communication while attempting to drag out the lifetime of the network and avoid availability debasement by utilizing forceful energy administration procedures. The plan of routing conventions in WSNs is influenced by many testing factors. These variables must be overcome before effective communication can be accomplished in WSN[3].

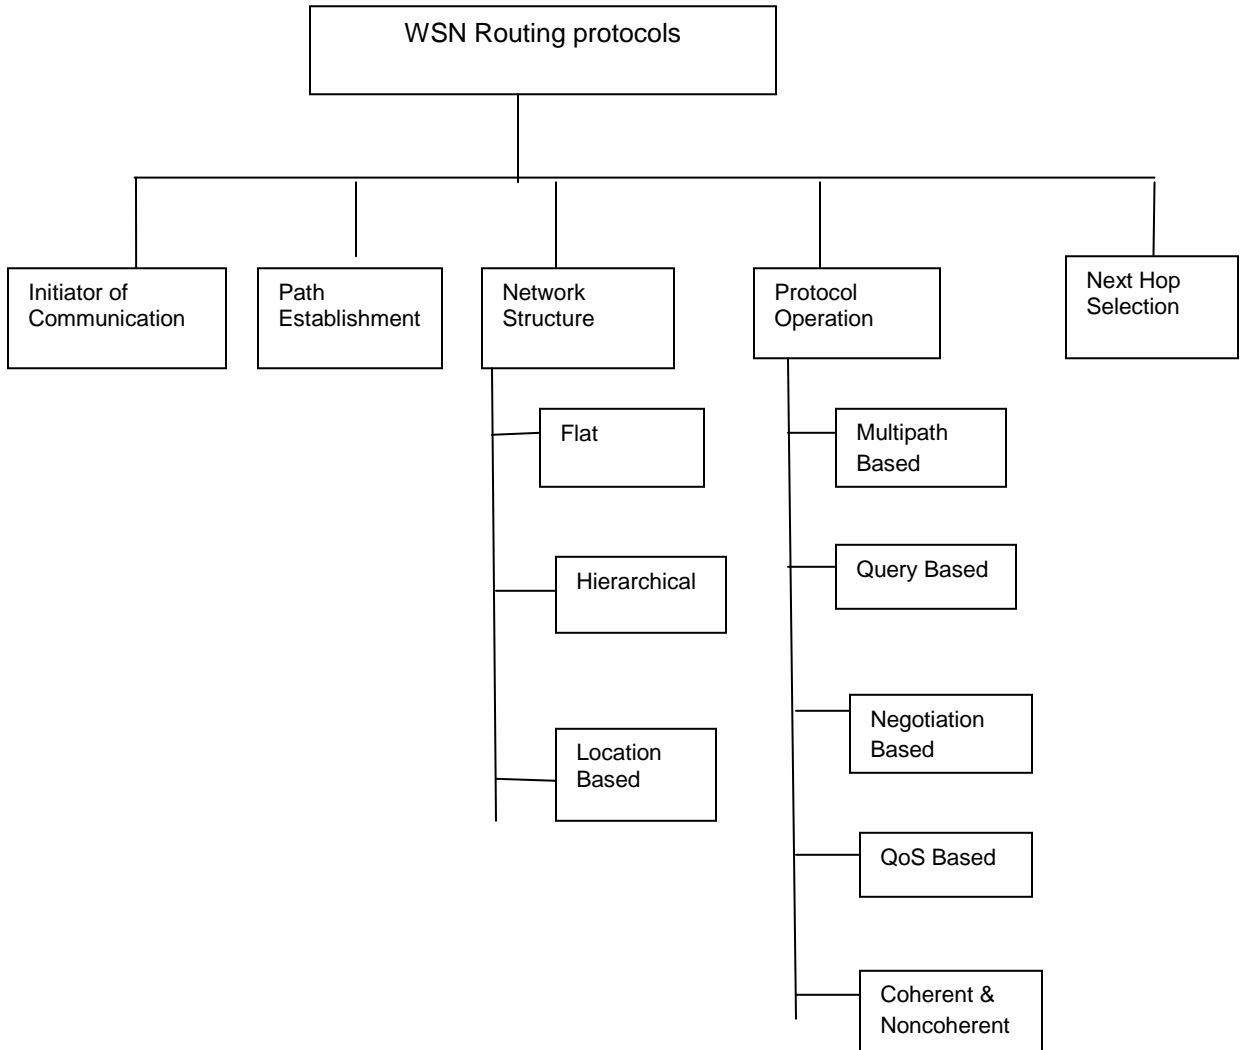


Figure 1: WSN Routing Protocols

(i) Initiator of Communication Based Routing Protocol:

In this sort of routing protocol, it relies upon the communication between a network parts, where they ordinarily in sleep mode impermanent. At the point when any piece of a network, the sink (goal, base station) hub or the source hub, needs benefit from other part, it will start the routing with other part to send or/and get the control or information packets. These are of two sorts:

- (a) Source initiator
- (b) Destination initiator

(ii) Path Establishment Protocols: Routing paths can be set up in one of three ways:

- a) Proactive: Proactive protocols figure every one of the courses previously they are extremely required and at that point store these courses in a routing table in every hub. The greater part of these routing protocols can be utilized both in flat and hierarchal organized networks.

- b) Reactive: Reactive protocols figure routes just when they are required. In reactive steering systems, route determination is on request utilizing route questioning before route foundation.
- c) Hybrid. : Hybrid protocols utilize a blend of these two thoughts. It utilizes clustering procedure which influences the system to steady and versatile. The system cloud is isolated into many clusters and these clusters are kept up progressively if a hub is included or leave a specific group[4].

(iii) Network Structure based routing protocols: Protocols are separated by the structure of network which is exceptionally pivotal for the required operation. The protocols included into this class are additionally isolated into three subcategories as indicated by their functionalities.

a) Flat: In flat networks, every node commonly assumes a similar part and sensor nodes work together to play out the detecting assignment. Because of the substantial number of such nodes, it isn't attainable to allocate a worldwide identifier to every hub. At the point when enormous measure of sensor nodes are required, flat based routing is required where each hub assumes same part. Cases of Flat-based routing conventions are: Energy Aware Routing, Directed Diffusion and Sequential Assignment Routing.

b) Hierarchical: Hierarchical or cluster-based routing, initially proposed in wireline networks, are notable systems with extraordinary focal points identified with scalability and efficient communication. All things considered, the idea of hierarchical routing is likewise used to perform energy-efficient routing in WSNs. At the point when organize scalability and efficient communication is required, hierarchical-based routing is the best match.

c) Location Based: In this sort of routing, sensor nodes are addressed by methods for their locations. The separation between neighboring nodes can be assessed based on incoming signal qualities. In this plan the area of nodes is known through a low power GPS on each node. So nodes are addresses by their area[5].

(iv) Protocol Operation based routing protocols: The capacity of a wireless sensor network determines its application. Subsequently, routing protocols can be classified by the operation used to fulfill a WSN work.

a) Multipath Based: The routing protocols that utilization multiple paths as opposed to a solitary path in request to improve the system execution are called multipath based routing protocols.
Examples:
Directed Diffusion
Multi path and Multi SPEED etc.

b) Query Based: In this sort of routing, the destination nodes proliferate a query for data (detecting assignment) from a hub through the system and a hub having this data sends the data which coordinates the query back to the hub, which starts the query. The destination hub sends query of enthusiasm from a hub through system and hub with this intrigue coordinates the query and send back to the hub which started the query. The query typically utilizes high level languages.

c) Negotiation Based: These protocols utilize abnormal state data descriptors so as to dispense with redundant data transmissions through negotiation. Communication choices are additionally taken in view of the resources that are accessible to them. The objective behind this routing plan is to limit copy data avoiding repetition through a few negotiation messages before the last data is being transmitted.

d) QoS Based: In this sort of routing, network needs an adjust approach for the QoS of applications. For this situation the application can delay touchy so to accomplish this QoS metric network need to search additionally for its vitality utilization which is another metric when communicating to the base station. So to accomplish QoS, the cost function for the coveted QoS likewise should be considered.

e) Coherent & Noncoherent: Data processing is a noteworthy part in the operation of remote sensor networks. Thus, routing strategies utilize distinctive data processing procedures. Coherent routing, where least processing is done on the

data and afterward sent to aggregators. The other strategy is noncoherent, where the node will itself process the gathered data previously sending it[7].

(v) Next Hop Selection: These protocols decide the next-hop on the route absolutely in light of the query content. This sort of steering protocols fits the most to the architecture of sensor networks, since the base station don't query particular nodes rather it asks for just for data paying little heed to its origin.

3. Conclusion

Routing in sensor networks is another region of research, with a constrained, however quickly developing arrangement of research comes about. In this paper, we have studied diverse routing protocols by considering a few order criteria, including area information, network layering and in network handling, data centricity, path redundancy and so on. They have the basic target of endeavoring to broaden the lifetime of the sensor network, while not trading off data conveyance. The routing methods are arranged into five categories. Furthermore, these protocols are grouped into multipath-based, query-based, negotiation-based, or QoS-based routing systems relying upon the convention operation.

References

- [1] Deepak Goyal, Malay Ranjan Tripathy, "Routing Protocols in Wireless Sensor Networks: A Survey", 2012 Second International Conference on Advanced Computing & Communication Technologies.
- [2] Hussein Mohammed Salman, "Survey of routing protocols in wireless sensor networks", International Journal of Sensors and Sensor Networks 2014; 2(1): 1-6.
- [3] Shio Kumar Singh, M P Singh, and D K Singh, "Routing Protocols in Wireless Sensor Networks –A Survey", International Journal of Computer Science & Engineering Survey (IJCSSES) Vol.1, No.2, November 2010.
- [4] Neha Rathi, Jyoti Saraswat et.al, "A Review on Routing Protocols for Application in Wireless Sensor Networks", International Journal of

Distributed and Parallel Systems (IJDPS) Vol.3, No.5, September 2012.

- [5] Kemal Akkaya, Mohamed Younis, "A survey on routing protocols for wireless sensor networks", Ad Hoc Networks 3 (2005) 325–349.
- [6] Hiba Sami Bazzi, Ali Masoud Haidar et.al, "Classification of routing protocols in wireless sensor Network", 978-1-4799-7186-2/15/\$31.00©2015 IEEE.
- [7] Jamal N. Al-Karaki Ahmed E. Kamal, "Routing Techniques in Wireless Sensor Networks: A Survey".